These drawings are the sole and exclusive property of Horizon Electronic Security and contain sensitive privileged or confidential information which may be used only for its benefit. The disclosure of these drawings to unauthorized persons is strictly prohibited. This document and all copies must be returned upon demand.
COPYRIGHT © 2026 Horizon Electronic Security, L.L.C.

FOR REFERENCE ONLY

This drawing is not a substitute for qualified field technicians. One hour of telephone support is available without charge.


NOTES:

1) Verify that each component requiring or supplying power has been configured for proper system voltage before applying power.

2) All wires to be 18 awg 100' max unless otherwise noted on drawing. Refer to manufacturers instructions for proper wire gauge on any power supply, electric device or electrified lock hardware. Manufacturers requirements take precedence.

3) All line voltage power to be I/ A/W local electrical code.

4) All low voltage wires to be stranded copper unless superseded by local electrical code or electric device manufacturer.

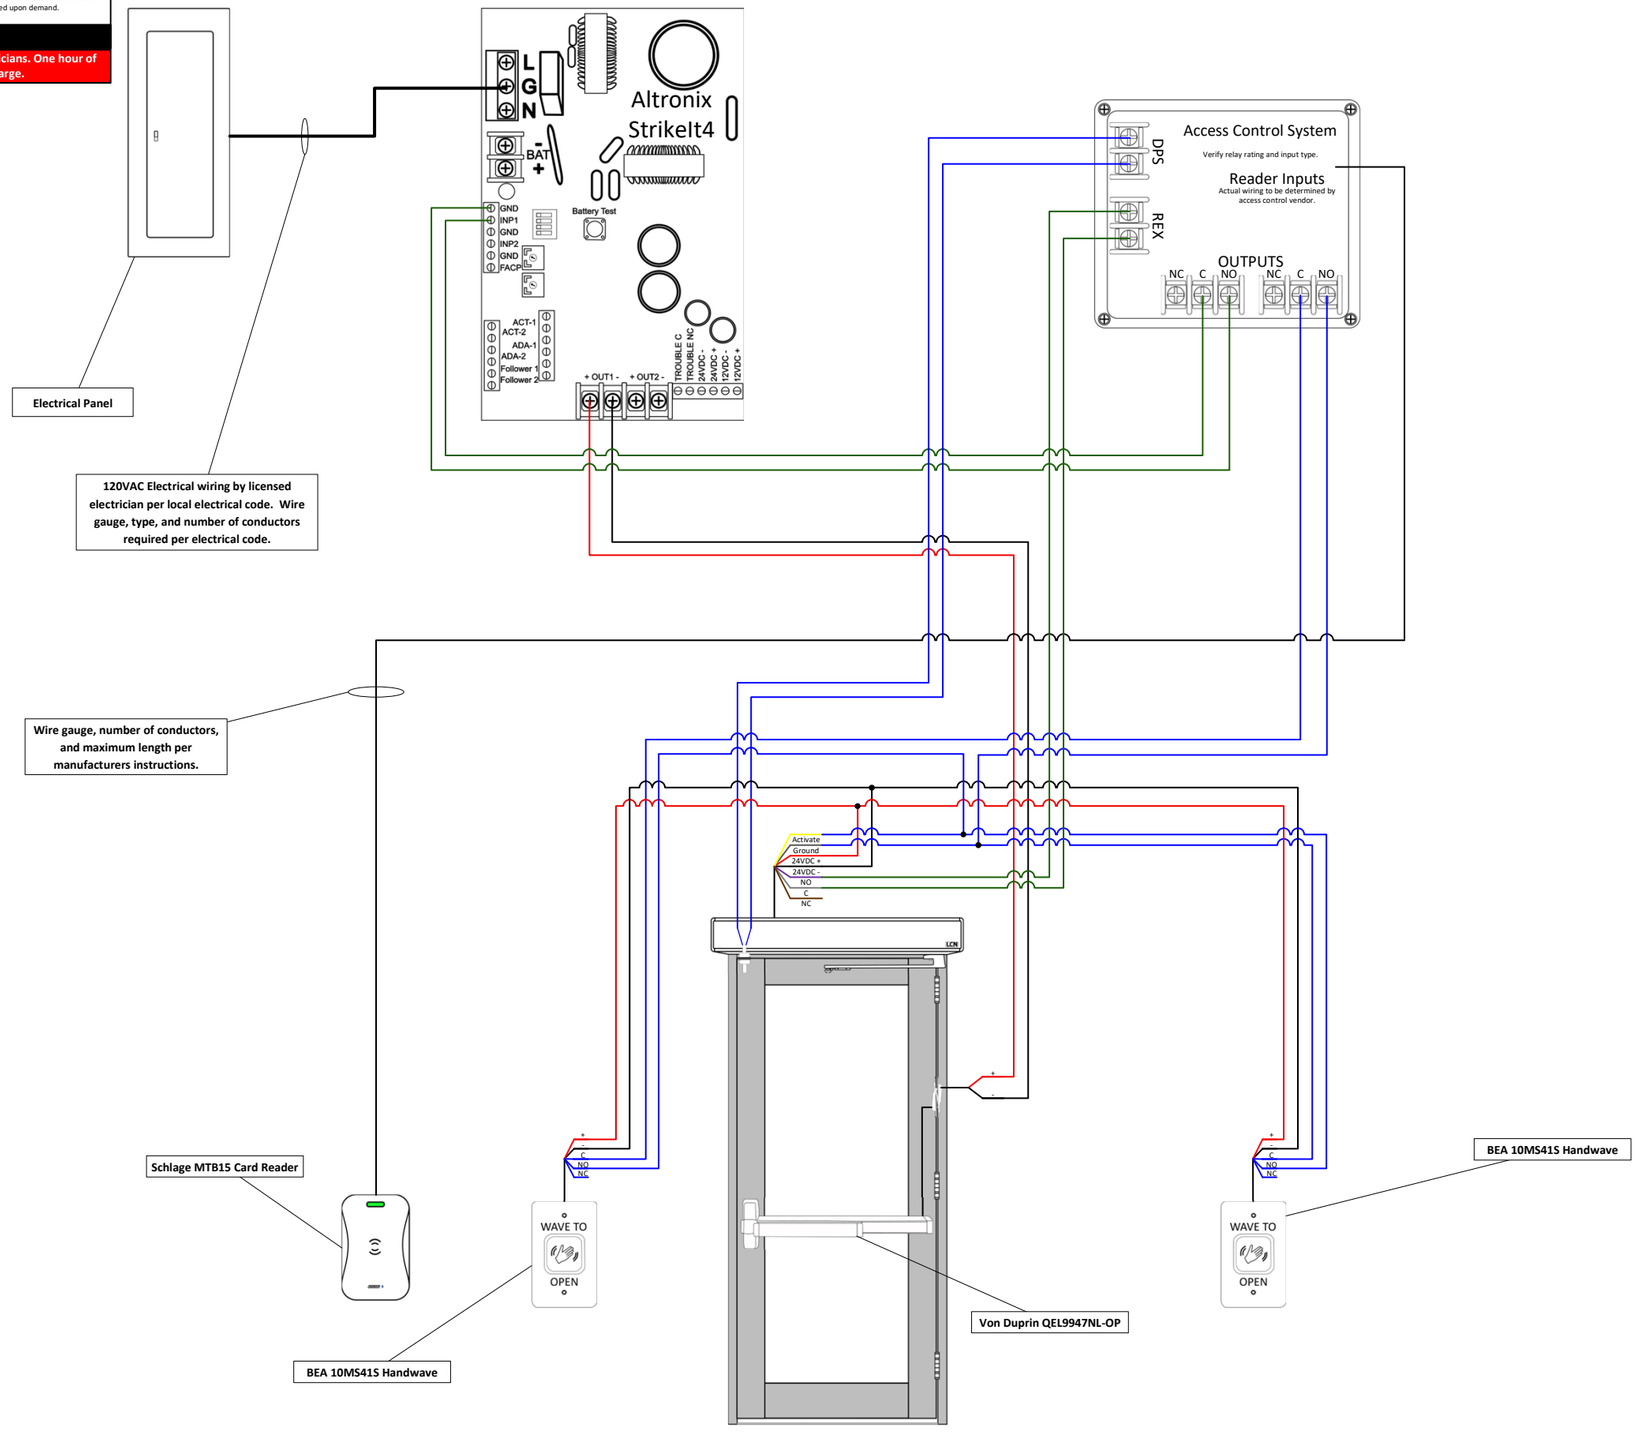

Function Statement:

From exterior- locked condition : Access via valid credential. Valid credential unlocks electric exit device and activates exterior handwave. Door can be pulled open manually or activated by the handwave.

From exterior - unlocked condition : Door to remail locked unless held unlocked by access control system.

From interior - locked condition : Free egress via exit device or interior handwave to activate auto operator. Interior handwave to unlock electric exit device and swing door.

From interior - unlocked condition : Same as locked condition.

General : Door contact to report open or closed status to access control.

Door Number: 1001A, 1101A, 1201A

Heading: AL-01, AL-05

Sheet: 1 of 2

Project: Customer Project

Customer: Horizon Customer

Created On: May 11, 2026

Drawn By: JS

Horizon Entrance Solutions, LLC.
1645 Lakes Parkway
Suite H
Lawrenceville, GA 30043

These drawings are the sole and exclusive property of Horizon Electronic Security and contain sensitive privileged or confidential information which may be used only for its benefit. The disclosure of these drawings to unauthorized persons is strictly prohibited. This document and all copies must be returned upon demand.
COPYRIGHT © 2026 Horizon Electronic Security, L.L.C.

FOR REFERENCE ONLY

This drawing is not a substitute for qualified field technicians. One hour of telephone support is available without charge.


NOTES:

1) ***Verify that each component requiring or supplying power has been configured for proper system voltage before applying power.***

2) ***All wires to be 18 awg 100' max unless otherwise noted on drawing. Refer to manufacturers instructions for proper wire gauge on any power supply, electric device or electrified lock hardware. Manufacturers requirements take precedence.***

3) ***All line voltage power to be I/ A/W local electrical code.***

4) ***All low voltage wires to be stranded copper unless superseded by local electrical code or electric device manufacturer.***

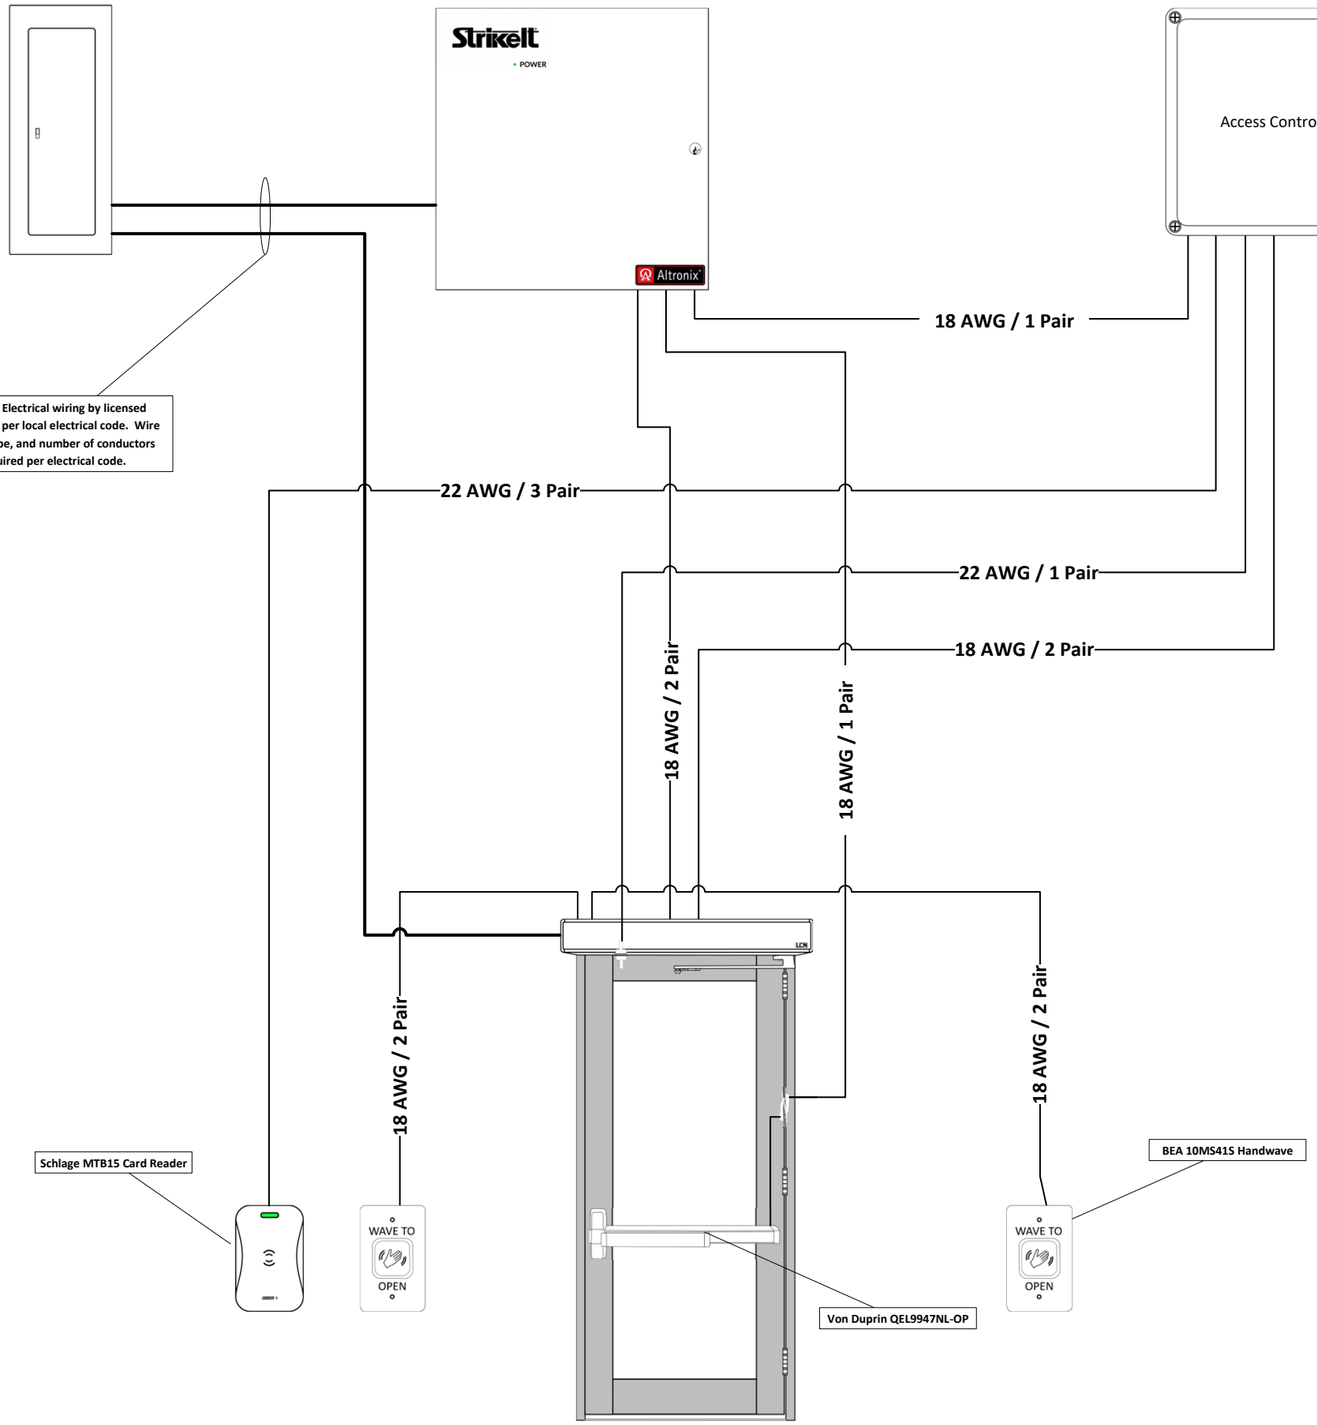

Door Number: 1001A, 1101A, 1201A

Heading: AL-01, AL-05

Sheet: 2 of 2

Project: Customer Project
Customer: Horizon Customer
Created On: May 11, 2026
Drawn By: JS

HORIZON ENTRANCE SOLUTIONS

Horizon Entrance Solutions, LLC.
1645 Lakes Parkway
Suite H
Lawrenceville, GA 30043